

# Vertex N

**BIFACIAL DUAL GLASS MONOCRYSTALLINE MODULE**

PRODUCT: TSM-NEG19RC.20

PRODUCT RANGE: 570-590W

## 590W

MAXIMUM POWER OUTPUT

## 0~+5W

POSITIVE POWER TOLERANCE

## 21.8%

MAXIMUM EFFICIENCY



### High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



### High power up to 590W

- Up to 21.8% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



### High reliability



- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



### High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.30%) and operating temperature
- Up to 30% additional power gain from back side depending on albedo

### Trina Solar's Vertex Bifacial Dual Glass Performance Warranty

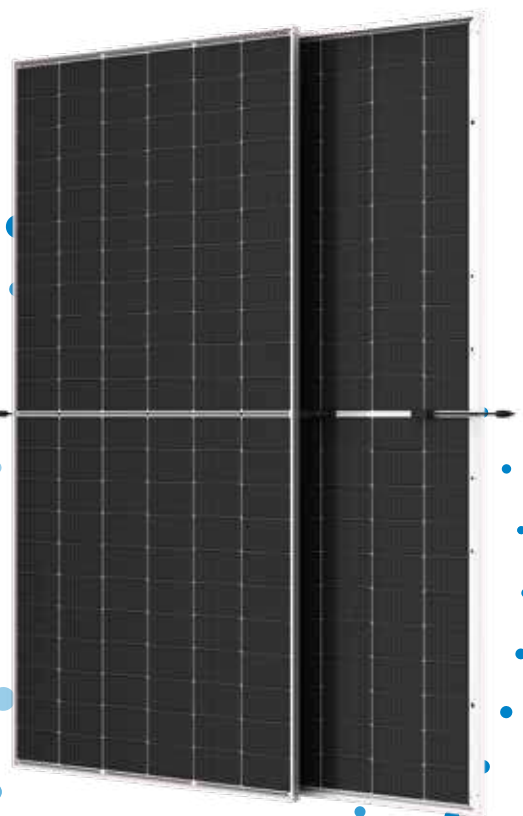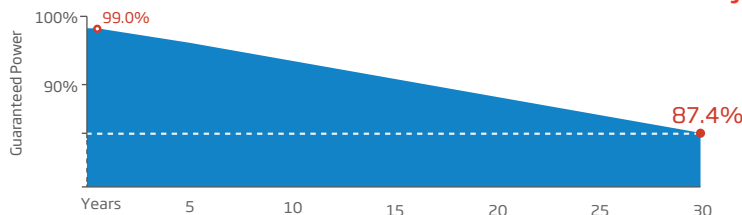


### Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716/UL61730  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System




**DIMENSIONS OF PV MODULE(mm)**

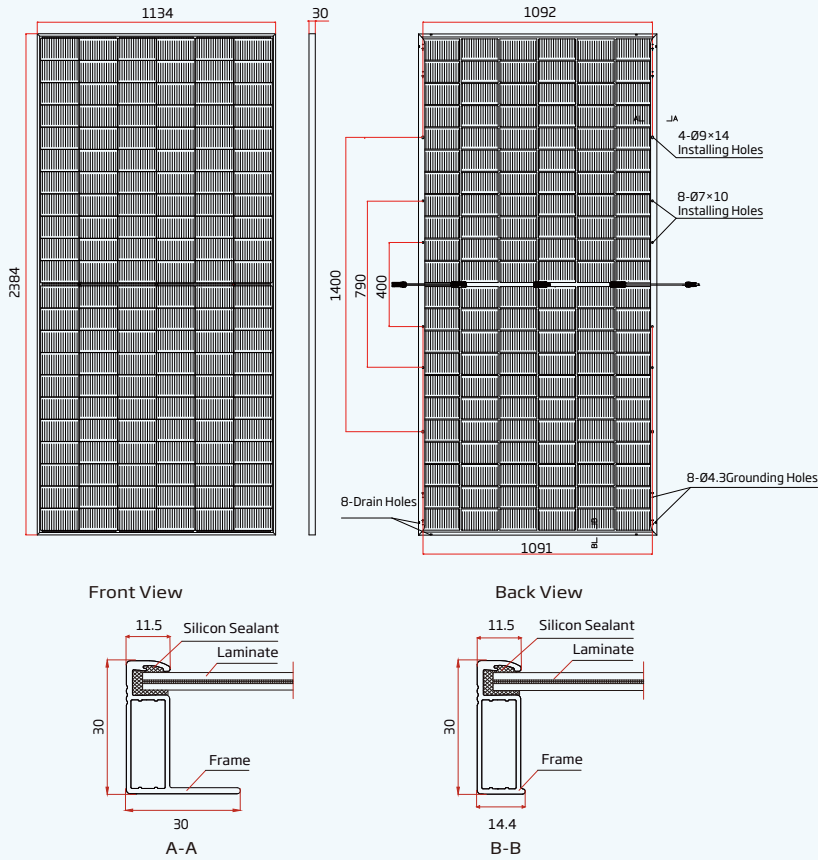

**I-V CURVES OF PV MODULE(580 W)**

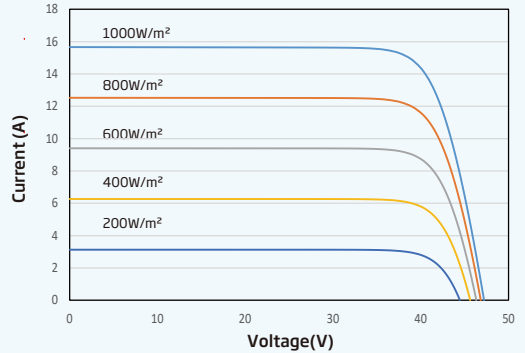

**P-V CURVES OF PV MODULE(580 W)**

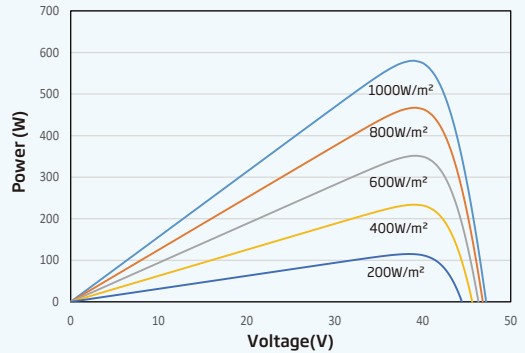

**ELECTRICAL DATA (STC)**

Peak Power Watts - P <sub>MAX</sub> (Wp)*	570	575	580	585	590
Power Tolerance - P <sub>MAX</sub> (W)			0 ~ +5		
Maximum Power Voltage - V <sub>MPP</sub> (V)	38.6	38.9	39.2	39.5	39.7
Maximum Power Current - I <sub>MPP</sub> (A)	14.75	14.78	14.79	14.82	14.86
Open Circuit Voltage - V <sub>OC</sub> (V)	46.6	46.9	47.2	47.5	47.8
Short Circuit Current - I <sub>SC</sub> (A)	15.61	15.63	15.65	15.68	15.72
Module Efficiency η <sub>m</sub> (%)	21.1	21.3	21.5	21.6	21.8

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

**Electrical characteristics with different power bin (reference to 10% Irradiance ratio)**

Total Equivalent power - P <sub>MAX</sub> (Wp)	616	621	626	632	637
Maximum Power Voltage - V <sub>MPP</sub> (V)	38.6	38.9	39.2	39.5	39.7
Maximum Power Current - I <sub>MPP</sub> (A)	15.93	15.96	15.97	16.01	16.05
Open Circuit Voltage - V <sub>OC</sub> (V)	46.6	46.9	47.2	47.5	47.8
Short Circuit Current - I <sub>SC</sub> (A)	16.86	16.88	16.90	16.93	16.98
Irradiance ratio (rear/front)			10%		

Power Bifaciality: 80±5%.

**ELECTRICAL DATA (NOCT)**

Maximum Power - P <sub>MAX</sub> (Wp)	434	438	442	446	450
Maximum Power Voltage - V <sub>MPP</sub> (V)	36.3	36.5	36.8	37.1	37.3
Maximum Power Current - I <sub>MPP</sub> (A)	11.97	11.99	12.00	12.02	12.05
Open Circuit Voltage - V <sub>OC</sub> (V)	44.2	44.5	44.7	45.0	45.3
Short Circuit Current - I <sub>SC</sub> (A)	12.58	12.59	12.61	12.64	12.67

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**MECHANICAL DATA**

Solar Cells	N Type
No. of cells	132 cells
Module Dimensions	2384×1134×30 mm (93.86×44.65×1.18 inches)
Weight	33.1kg (72.97lb)
Front Glass	2.0 mm (0.08 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	30mm(1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Portrait: 350/280 mm(13.78/11.02 inches) Length can be customized
Connector	TS4

**TEMPERATURE RATINGS**

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	-0.30%/°C
Temperature Coefficient of V <sub>OC</sub>	-0.24%/°C
Temperature Coefficient of I <sub>SC</sub>	0.04%/°C

**MAXIMUM RATINGS**

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	35A

**WARRANTY**

12 year Product Workmanship Warranty  
30 year Power Warranty  
1% first year degradation  
0.40% Annual Power Attenuation

(Please refer to product warranty for details)

**PACKAGING CONFIGURATION**

Modules per box: 36 pieces  
Modules per 40' container: 720 pieces